1. CONTRACTOR SHALL INSTALL TEMPORARY ASPHALT PATCH IN ALL DISTURBED AREAS OF MAIN STREET (INCLUDING CROSS WALK) IMMEDIATELY FOLLOWING WATER MAIN CONSTRUCTION.
2. CONTRACTOR SHALL REMOVE EXISTING ASPHALT PAVEMENT, UNDERLYING RUBBLIZED CONCRETE PAVEMENT, AND BASE COURSE WITHIN THE APPROXIMATE LIMITS OF STREET RECONSTRUCTION. RECONSTRUCTION TO INCLUDE 10" OF BASE COURSE AND 3-3/4" OF ASPHALT.

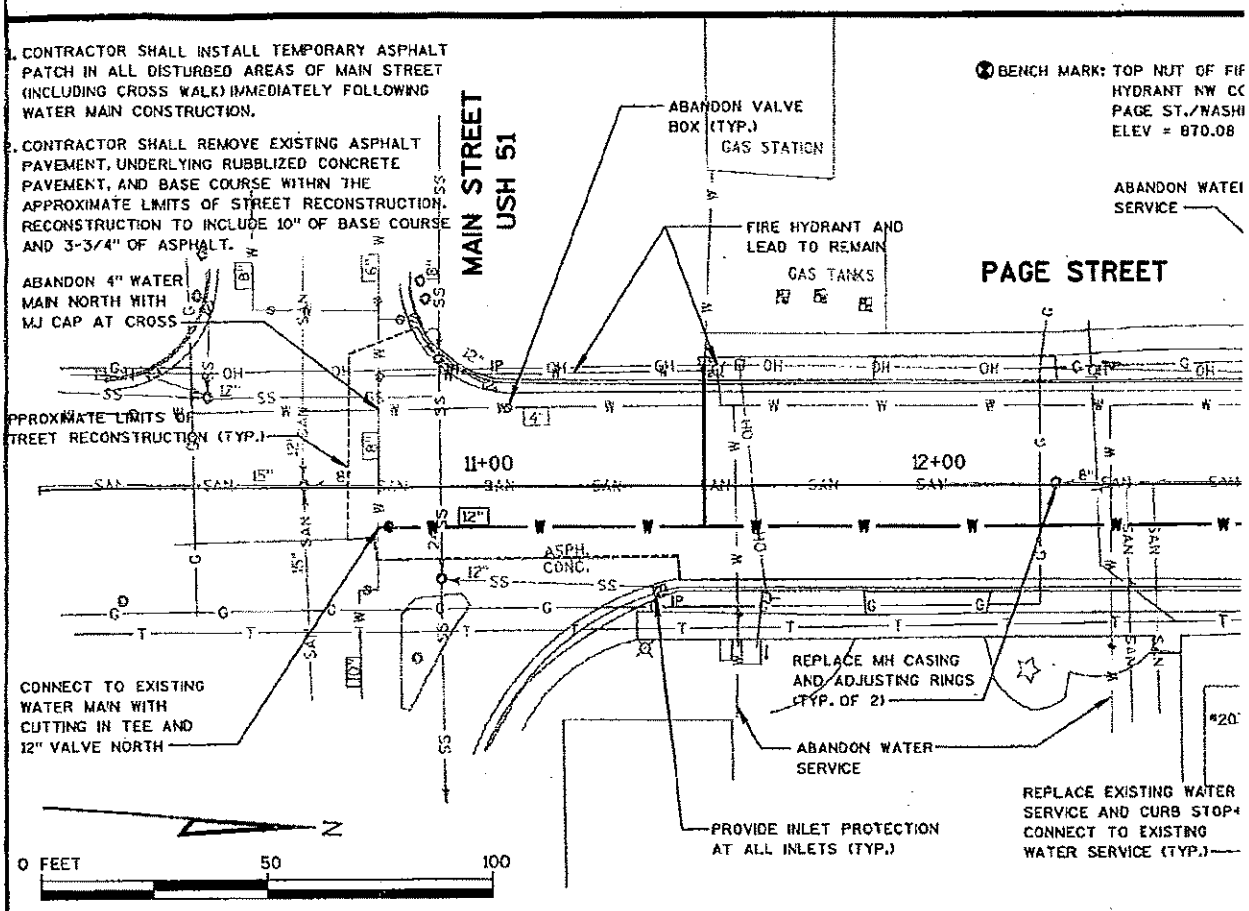

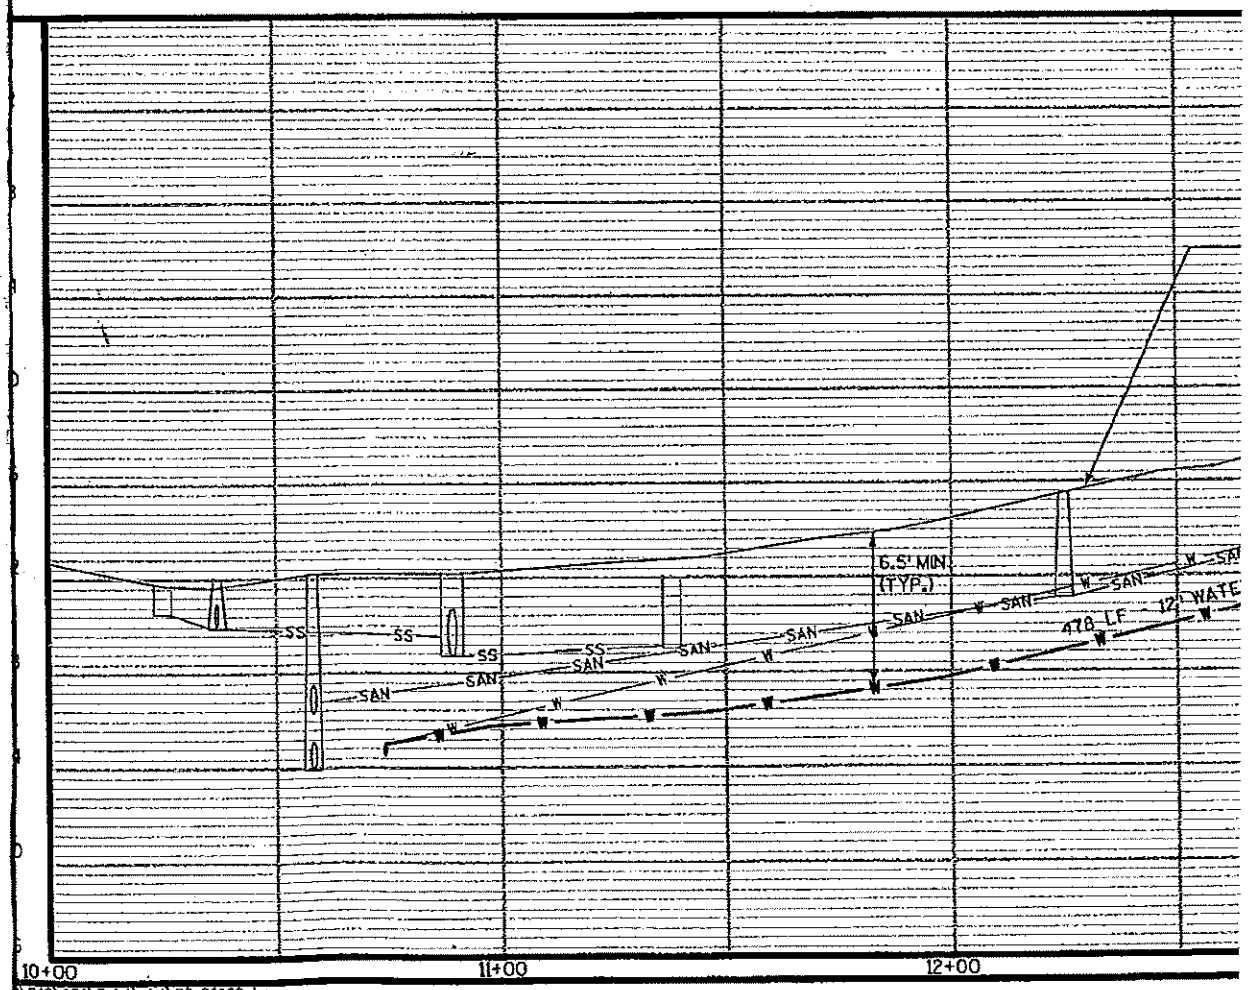

\040\024\Point\plot\RCp01100.dgn